



*Version 2019

Premium Steel Roofing Tiles for an elegant finish, modern look and unrivalled durability from Mabati Rolling Mills Limited






Zentile is the true expression of harmony and elegance in a painted steel tile, alluding to the quiet power of ocean waves in a beautiful roof finish. Zentile is a steel tile roofing sheet with a durable and water resistant surface while offering a good-looking contemporary appearance. Zentile is fast becoming a popular choice for designers and home owners alike. The wave like shape inspires peace, harmony and well-being while allowing for one's creativity to flow freely.

Specifications

Specifications

- **Overall Width:** 1,120mm +/- 5mm
- **Effective cover width:** 1,000mm +/- 5mm
- **Length/Square Meter:** 1,000mm
- **Lengths:** 600mm upwards in multiples of 300mm
Maximum recommended length for 0.32mm is 6m
- **Base material:** ZINCAL© coils made using world class patented metal coating technology
- **Paint systems:** Color Plus Textured and optima
- **Finish:** Gloss or Textured
- **Thickness:** 0.32mm, 0.4mm, 0.5mm, 0.6mm (+/- 10%) Minimum 0.3mm(28g)
Maximum 0.60mm (22g)

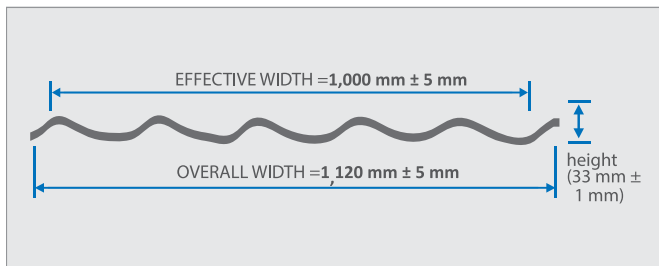

Material options

Aluminium- Zinc Gauge (mm)

AZ85, AZ100-AZ150 0.32 0.40 0.50 0.60

Zentile is rolled in soft material only- G275

- **Input coil width:** 1220mm
- **Profiled sheet width (overall width):** 1120mm
- **Rib to Rib width i.e.: Pitch:** 200mm
- **Depth of each tile (Step to Step):** 300mm
- **Effective cover width:** 1000mm
- **Purlin spacing:** 600mm

Purling spacing

Battens / purlins should be spaced at 300mm on both ridge and eave (i.e.: at every tile step), and at maximum 600mm (i.e.: at every second tile step) 0 internal spans, although battens at every step will be stronger

Roof pitch

Zentile can be used on a roof pitched from as low as 15degrees

Features:

- **Sheets**
 - Continuous length profile increases visual uniformity
 - Reduces chance leakage
 - Lightweight safer to lift and install while enabling the supporting structure to be less bulky/costly
- No underlays needed
- Rapid roof coverage
 - Large panel size enables roofing to be completed faster
 - Easy and secure - roofing sheets are fixed to the roof structure
- World class patented coating technology
- MRM Mark of Quality - each sheet is inspected over 6 times before dispatch
- Engineered to prevent leakage by capillary action



NAIROBI

Old Mombasa Road
Cell: +254 788 202020/ 735511180
Email: marketing.mrmroofing@safalgroup.com

MARIAKANI

Mariakani
Cell: +254 722 205396 / 722 205397
Email: mrmcoils@safalgroup.com

MOMBASA

Mombasa-Malindi Highway,
Cell: +254 733 474 766
Email: mombasa.mrmroofing@safalgroup.com

KISII

Industrial Area Road, Daraja Mbili,
Cell: +254 718215659
Email: kisii.mrmroofing@safalgroup.com

THIKA

Kiboko Road
Cell: +254 780 909030
Email: thika.mrmroofing@safalgroup.com

KISUMU

Sabuni Road, Industrial Area
Cell: +254 733 600 150
Email: kisumu.mrmroofing@safalgroup.com

ELDORET

Kapsoya, Uganda Road
Cell: +254 780909040
Email: eldoret.mrmroofing@safalgroup.com

NYERI

Nyeri-Nyahururu Road,
Cell: +254 733887790
Email: nyeri.mrmroofing@safalgroup.com

NAKURU

Nairobi-Nakuru Highway,
Cell: +254 738865980
Email: nyeri.mrmroofing@safalgroup.com

KITENGELA

Kitengela MRM Showroom
Nairobi- Namanga Road
Cell: +254 708593691
Email: mrmroofing.kitengela@safalgroup.com

Toll Free Number: 0800 722 711